

PERISTALTIC DOSING PUMP


PPA



The peristaltic pump PPA-6 with is meant to be used on the ware washing machines. It is a fixed capacity peristaltic pump controlled by a conductivity meter included in the installation kit.

The pump code PPA0006A1000_A has the following features:


CERTIFICATION	CE, EAC
TYPE	PA-6
POWER SUPPLY	230 Vac 50/60 Hz
CONSUMPTION	3,5 W
PERISTALTIC TUBE MATERIAL	SANTOPRENE (6x10)
CC/REVOLUTION	2,5
FLOW-RATE	6 l/h
BACKPRESSURE	0,1 BAR
PSI	1,450
GPD	38,05
GPH	1,585
IP DEGREE	IP 65
DOSING TYPE	Fixed flow rate with dosing driven by conductivity reading

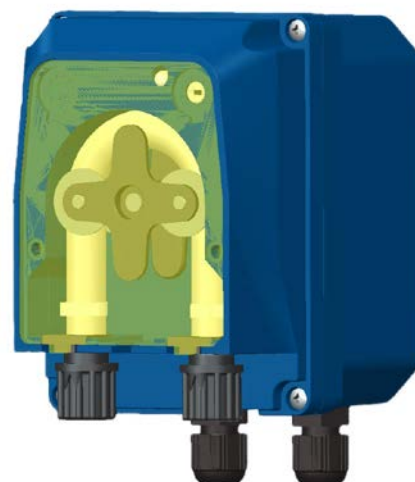

INSTALLATION KIT

FIXING BRACKET	PC Wall bracket
DISCHARGE TUBING	4m 4x6 PVC
FOOT FILTER	PP body with Ceramic weight
INPUT TUB KIT	Injection fitting (AISI) + Fitting 4x6
CONDUCTIVITY PROBE	Conductive probe K3,3 with 15 cm cable

DIMENSIONAL DRAWINGS

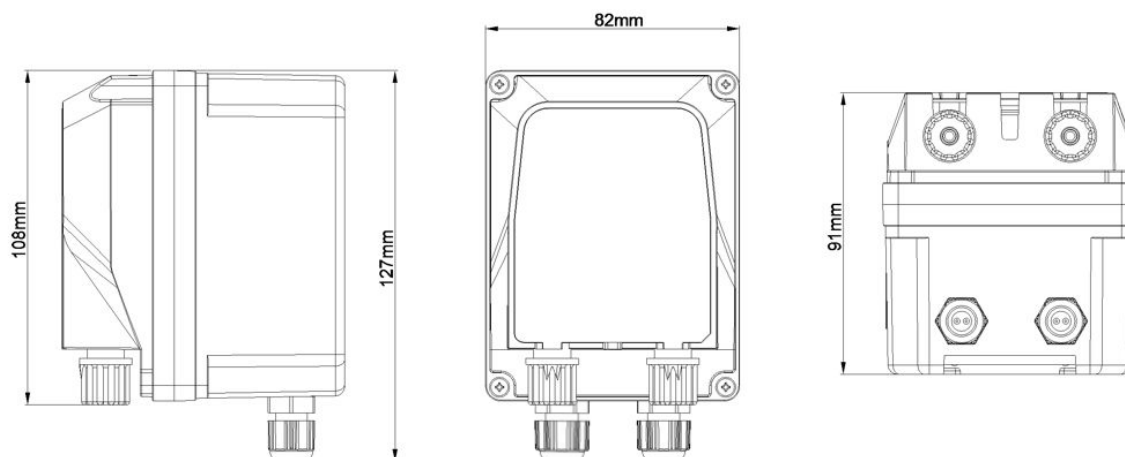

SEKO spa has taken all reasonable measures about the accuracy of this translation, but regrets that no responsibility can be accepted for any error, omission or inaccuracy. In case of doubt or dispute, as provided by the European Directive, only the original language text is valid.